WALL OPENING HIGHT [Ho]	1 000	1 500	2 000	2 500	3 000	3 500	4 000	4 500	5 000	5 500	6 000	6 500	7 000	7 500	8 000	8 500	9 000	9 500	10 000	10 500	11 000	11 500	12 000
10 000	1	1	2	2	3	4	4	5	6	6	8	8	8	8	8	8	8	8	8	8	8	9	9
9 750	1	1	2	2	3	4	4	5	6	6	8	8	8	8	8	8	8	8	8	8	8	9	9
9 500	1	1	2	2	2	4	4	5	5	6	8	8	8	8	8	8	8	8	8	8	8	9	9
9 250	1	1	2	2	2	4	4	5	5	6	8	8	8	8	8	8	8	8	8	8	8	8	9
9 000	1	1	2	2	2	4	4	5	5	6	6	8	8	8	8	8	8	8	8	8	8	8	9
8 750	1	1	2	2	2	4	4	4	5	6	6	8	8	8	8	8	8	8	8	8	8	8	9
8 500	1	1	2	2	2	4	4	4	5	5	6	8	8	8	8	8	8	8	8	8	8	8	8
8 250	1	1	2	2	2	4	4	4	5	5	6	8	8	8	8	8	8	8	8	8	8	8	8
8 000	1	1	1	2	2	4	4	4	5	5	6	8	8	8	8	8	8	8	8	8	8	8	8
7 750	1	1	1	2	2	4	4	4	5	5	5	8	8	8	8	8	8	8	8	8	8	8	8
7 500	1	1	1	2	2	4	4	4	4	5	5	8	8	8	8	8	8	8	8	8	8	8	8
7 250	1	1	1	2	2	4	4	4	4	5	5	8	8	8	8	8	8	8	8	8	8	8	8
7 000	1	1	1	2	2	4	4	4	4	5	5	8	8	8	8	8	8	8	8	8	8	8	8
6 750	1	1	1	2	2	4	4	4	4	5	5	8	8	8	8	8	8	8	8	8	8	8	8
6 500	1	1	1	1	2	4	4	4	4	5	5	7	8	8	8	8	8	8	8	8	8	8	8
6 250	1	1	1	1	2	3	4	4	4	5	5	7	8	8	8	8	8	8	8	8	8	8	8
6 000	1	1	1	1	2	3	4	4	4	5	5	5	7	8	8	8	8	8	8	8	8	8	8
5 750	1	1	1	1	2	3	4	4	4	5	5	5	7	1	8	8	8	8	8	8	8	8	8
5 500	1	1	1	1	2	2	3	4	4	5	5	5	7	7	8	8	8	8	8	8	8	8	8
5 250	1	1	1	1	1	2	3	4	4	4	5	5	7	7	8	8	8	8	8	8	8	8	8
5 000	1	1	1	1	1	2	3	4	4	4	5	5	7	7	7	8	8	8	8	8	8	8	8
4 750	1	1	1	1	1	2	3	3	4	4	4	5	7	7	7	8	8	8	8	8	8	8	8
4 500	1	1	1	1	1	2	3	3	4	4	4	5	7	7	7	7	8	8	8	8	8	8	8
4 250	1	1	1	1	1	1	2	3	4	4	4	4	6	7	7	7	7	8	8	8	8	8	8
4 000	1	1	1	1	1	1	2	3	3	4	4	4	5	7	7	7	7	7	7	8	8	8	8
3 750	1	1	1	1	1	1	2	2	3	4	4	4	4	6	7	7	7	7	7	8	8	8	8
3 500	1	1	1	1	1	1	2	2	3	3	4	4	4	6	6	7	7	7	7	8	8	8	8
3 250	1	1	1	1	1	1	2	2	2	3	4	4	4	6	6	6	7	7	7	8	8	8	8
3 000	1	1	1	1	1	1	1	2	2	3	3	4	4	4	6	6	6	7	7	8	8	8	8
2 750	1	1	1	1	1	1	1	2	2	1	3	4	4	4	5	6	6	6	7	8	8	8	8
2 500	1	1	1	1	1	1	1	2	2	2	2	4	4	4	5	5	6	6	6	8	8	8	8
2 250	1	1	1	1	1	1	1	2	2	2	2	4	4	4	5	5	5	6	6	8	8	8	8
2 000	1	1	1	1	1	1	1	2	2	2	2	3	4	4	5	5	5	5	6	7	8	8	8
1 750	1	1	1	1	1	1	1	1	2	2	2	3	3	4	5	5	5	5	5	7	7	8	8
1 500	1	1	1	1	1	1	1	1	2	2	2	2	3	3	4	5	5	5	5	7	7	7	7
1 250	1	1	1	1	1	1	1	1	1	2	2	2	3	3	3	5	5	5	5	7	7	7	7
1 000	1	1	1	1	1	1	1	1	1	1	2	2	2	2	3	4	5	5	5	6	7	7	7

WALL OPENING WIDTH [So]

DESCRIPCTION
- required dimensions
  for cassette Sk x Hk [mm]:

- 250 x 250
- 300 x 300
- 350 x 350
- 400 x 400
- 450 x 450
- 500 x 500
- 550 x 550
- 600 x 600

DESCRIPCTION
- dedicated VIC electric drive:

1-phase tubular motors 1x230 VAC

1 - Simu T6 60/12 (60Nm)
2 - Simu T6 100/12 (100Nm)
3 - Simu T6 120/12 (120Nm)
4 - Simu T8 200/94 (200Nm)
5 - Simu T8 300/94 (300Nm)
6 - Simu T8 350/124 (350Nm)
7 - Simu T8 450/124 (450Nm)

3-phase external motors, 3x400 VAC

8 - VIC-0740 (1617Nm)
9 - VIC-0741 (2450Nm)

FIRE SCREEN FS EI1-60 / EI2-90 / EW120

INSTALLATION REQUIREMENTS

edition 1,
Sep 2018

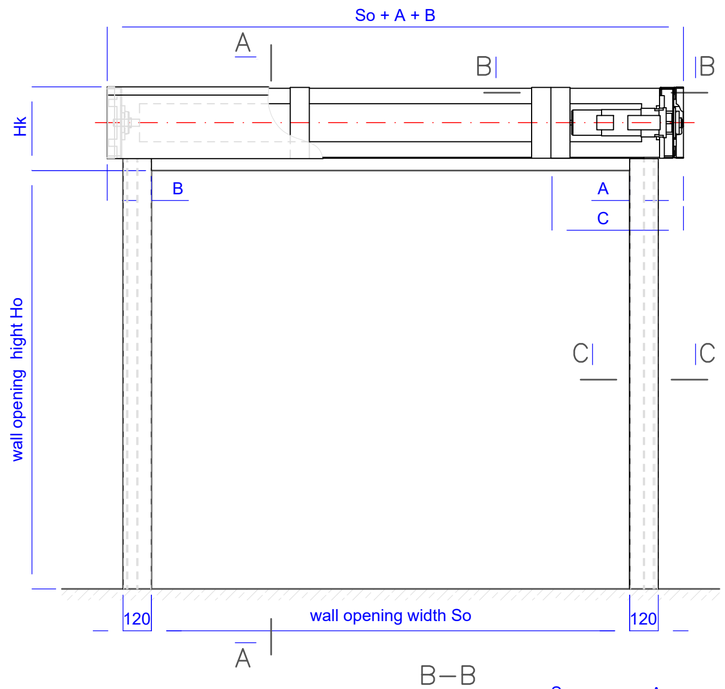

Dimension set

motor type	A	B	C	D
1 - 7	175	175	n/d	n/d
8	280		550	330
9	280		600	430

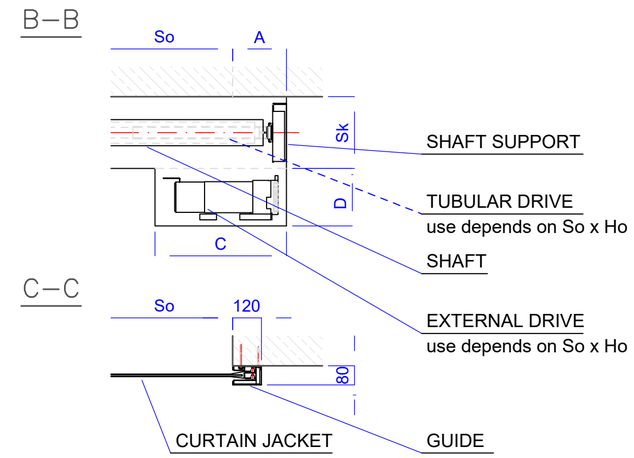

Notice:
- drawing assumptions:
  - drive on the right,
  - shaft - lintel mounting,
  - guides - wall mounting;
- shaft could be ceiling mounted with additional e.g. light structure in height min. h = Hk and required fire protection class;
- guides could be niche mountedst with additional e.g. light strucrures in width min. A (drive side) and B (opposite side);
- Next Door Systems B.V. reserves the right to make changes in this guidelines;